


KEYTE SELF-ALIGNING BEARINGS

IMPERIAL PIN-SIZE - 'G'								
Part-Number	ALL DIMENSIONS IN INCHES (UNLESS STATED OTHERWISE)							Max Angle
	A	B	C	D	E	F	G	+/- deg
K 100 R 050 125	2.00	1.50	0.563	1.25	0.560	1.00	0.500	
K 100 R 062 125	2.00	1.50	0.563	1.25	0.686	1.00	0.625	9.0
K 125 R 075 100	2.00	2.00	0.750	1.00	0.875	1.25	0.750	7.6
K 125 R 075 125	2.25	2.00	0.750	1.25	0.875	1.25	0.750	7.6
K 125 R 075 150	2.50	2.00	0.750	1.50	0.875	1.25	0.750	7.6
K 137 R 087 125	2.38	2.25	0.875	1.25	1.000	1.38	0.875	7.1
K 137 R 087 150	2.63	2.25	0.875	1.50	1.000	1.38	0.875	7.1
K 137 R 087 175	2.88	2.25	0.875	1.75	1.000	1.38	0.875	7.1
K 175 R 075 150	2.75	2.50	1.000	1.50	1.250	1.75	0.750	10.7
K 175 R 100 150	2.75	2.50	1.000	1.50	1.250	1.75	1.000	10.7
K 175 R 112 150	2.75	2.50	1.000	1.50	1.250	1.75	1.125	10.7
K 175 R 075 045	3.02	2.50	1.000	45mm	1.250	1.75	0.750	10.7
K 175 R 100 045	3.02	2.50	1.000	45mm	1.250	1.75	1.000	10.7
K 175 R 112 045	3.02	2.50	1.000	45mm	1.250	1.75	1.125	10.7
K 175 RX 075 150	3.00	3.00	1.000	1.50	1.250	1.75	0.750	10.7
K 175 RX 100 150	3.00	3.00	1.000	1.50	1.250	1.75	1.000	10.7
K 175 RX 112 150	3.00	3.00	1.000	1.50	1.250	1.75	1.125	10.7
K 175 RX 075 225	3.75	3.00	1.000	2.25	1.250	1.75	0.750	10.7
K 175 RX 100 225	3.75	3.00	1.000	2.25	1.250	1.75	1.000	10.7
K 175 RX 112 225	3.75	3.00	1.000	2.25	1.250	1.75	1.125	10.7
K 212 R 112 150	3.00	3.00	1.125	1.50	1.500	2.13	1.125	12.9
K 212 R 125 150	3.00	3.00	1.125	1.50	1.500	2.13	1.250	12.9
K 212 R 112 200	3.50	3.00	1.125	2.00	1.500	2.13	1.125	12.9
K 212 R 125 200	3.50	3.00	1.125	2.00	1.500	2.13	1.250	12.9
K 212 R 112 275	4.25	3.00	1.125	2.75	1.500	2.13	1.125	12.9
K 212 R 125 275	4.25	3.00	1.125	2.75	1.500	2.13	1.250	12.9
K 212 R 112 450	6.00	3.00	1.125	4.50	1.500	2.13	1.125	12.9
K 212 R 125 450	6.00	3.00	1.125	4.50	1.500	2.13	1.250	12.9

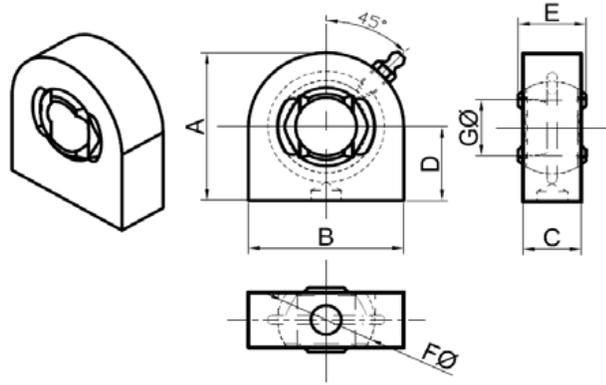

KEYTE SELF-ALIGNING BEARINGS

IMPERIAL PIN-SIZE - 'G'

Part-Number	ALL DIMENSIONS IN INCHES (UNLESS STATED OTHERWISE)							Max Angle
	A	B	C	D	E	F	G	+/- deg
K 212 RX 112 175	3.75	4.00	1.125	1.75	1.500	2.13	1.125	12.9
K 212 RX 125 175	3.75	4.00	1.125	1.75	1.500	2.13	1.250	12.9
K 212 RX 112 200	4.00	4.00	1.125	2.00	1.500	2.13	1.125	12.9
K 212 RX 125 200	4.00	4.00	1.125	2.00	1.500	2.13	1.250	12.9
K 212 RX 112 225	4.25	4.00	1.125	2.25	1.500	2.13	1.125	12.9
K 212 RX 125 225	4.25	4.00	1.125	2.25	1.500	2.13	1.250	12.9
K 212 RX 112 250	4.50	4.00	1.125	2.50	1.500	2.13	1.125	12.9
K 212 RX 125 250	4.50	4.00	1.125	2.50	1.500	2.13	1.250	12.9
K 250 R 125 200	4.00	4.00	1.250	2.00	1.625	2.50	1.250	10.5
K 250 R 150 200	4.00	4.00	1.250	2.00	1.625	2.50	1.500	10.5
K 250 R 125 250	4.50	4.00	1.250	2.50	1.625	2.50	1.250	10.5
K 250 R 150 250	4.50	4.00	1.250	2.50	1.625	2.50	1.500	10.5
K 300 R 175 275	5.00	4.50	1.500	2.75	1.900	3.00	1.750	9.3
K 325 R 175 250	4.75	4.50	1.750	2.50	2.000	3.25	1.750	5.4
K 325 R 200 250	4.75	4.50	1.750	2.50	2.000	3.25	2.000	5.4
K 325 R 175 275	5.00	4.50	1.750	2.75	2.000	3.25	1.750	5.4
K 325 R 200 275	5.00	4.50	1.750	2.75	2.000	3.25	2.000	5.4
K 325 RX 175 275	5.75	6.00	1.750	2.75	2.000	3.25	1.750	5.4
K 325 RX 200 275	5.75	6.00	1.750	2.75	2.000	3.25	2.000	5.4
K 350 R 225 325	5.75	5.00	2.000	3.25	2.312	3.50	2.250	6.5
K 500 R 300 450	8.25	7.50	2.750	4.50	3.000	5.00	3.000	3.5
K 500 R 325 450	8.25	7.50	2.750	4.50	3.000	5.00	3.250	3.5