


## KEYTE SELF-ALIGNING BEARINGS

IMPERIAL PIN-SIZE - 'G'								
Part-Number	ALL DIMENSIONS IN mm (UNLESS STATED OTHERWISE)							Max Angle
	A	B	C	D	E	F	G	+/- deg
K 100 R 050 125	50.80	38.10	14.29	31.75	14.22	25.40	12.70	
K 100 R 062 125	50.80	38.10	14.29	31.75	17.41	25.40	15.88	9.0
K 125 R 075 100	50.80	50.80	19.05	25.40	22.23	31.75	19.05	7.6
K 125 R 075 125	57.15	50.80	19.05	31.75	22.23	31.75	19.05	7.6
K 125 R 075 150	63.50	50.80	19.05	38.10	22.23	31.75	19.05	7.6
K 137 R 087 125	60.33	57.15	22.23	31.75	25.40	34.93	22.23	7.1
K 137 R 087 150	66.68	57.15	22.23	38.10	25.40	34.93	22.23	7.1
K 137 R 087 175	73.03	57.15	22.23	44.45	25.40	34.93	22.23	7.1
K 175 R 075 150	69.85	63.50	25.40	38.10	31.75	44.45	19.05	10.7
K 175 R 100 150	69.85	63.50	25.40	38.10	31.75	44.45	25.40	10.7
K 175 R 112 150	69.85	63.50	25.40	38.10	31.75	44.45	28.58	10.7
K 175 R 075 045	76.75	63.50	25.40	45.00	31.75	44.45	19.05	10.7
K 175 R 100 045	76.75	63.50	25.40	45.00	31.75	44.45	25.40	10.7
K 175 R 112 045	76.75	63.50	25.40	45.00	31.75	44.45	28.58	10.7
K 175 RX 075 150	76.20	76.20	25.40	38.10	31.75	44.45	19.05	10.7
K 175 RX 100 150	76.20	76.20	25.40	38.10	31.75	44.45	25.40	10.7
K 175 RX 112 150	76.20	76.20	25.40	38.10	31.75	44.45	28.58	10.7
K 175 RX 075 225	95.25	76.20	25.40	57.15	31.75	44.45	19.05	10.7
K 175 RX 100 225	95.25	76.20	25.40	57.15	31.75	44.45	25.40	10.7
K 175 RX 112 225	95.25	76.20	25.40	57.15	31.75	44.45	28.58	10.7
K 212 R 112 150	76.20	76.20	28.58	38.10	38.10	53.98	28.58	12.9
K 212 R 125 150	76.20	76.20	28.58	38.10	38.10	53.98	31.75	12.9
K 212 R 112 200	88.90	76.20	28.58	50.80	38.10	53.98	28.58	12.9
K 212 R 125 200	88.90	76.20	28.58	50.80	38.10	53.98	31.75	12.9
K 212 R 112 275	107.95	76.20	28.58	69.85	38.10	53.98	28.58	12.9
K 212 R 125 275	107.95	76.20	28.58	69.85	38.10	53.98	31.75	12.9
K 212 R 112 450	152.40	76.20	28.58	114.30	38.10	53.98	28.58	12.9
K 212 R 125 450	152.40	76.20	28.58	114.30	38.10	53.98	31.75	12.9

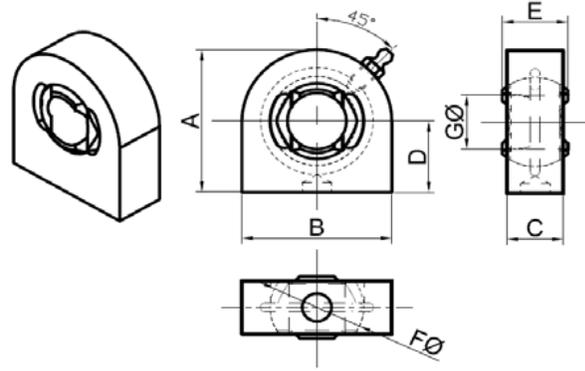

## KEYTE SELF-ALIGNING BEARINGS

IMPERIAL PIN-SIZE - 'G'								
Part-Number	ALL DIMENSIONS IN mm (UNLESS STATED OTHERWISE)							Max Angle
	A	B	C	D	E	F	G	+/- deg
K 212 RX 112 175	95.25	101.60	28.58	44.45	38.10	53.98	28.58	12.9
K 212 RX 125 175	95.25	101.60	28.58	44.45	38.10	53.98	31.75	12.9
K 212 RX 112 200	101.60	101.60	28.58	50.80	38.10	53.98	28.58	12.9
K 212 RX 125 200	101.60	101.60	28.58	50.80	38.10	53.98	31.75	12.9
K 212 RX 112 225	107.95	101.60	28.58	57.15	38.10	53.98	28.58	12.9
K 212 RX 125 225	114.30	101.60	28.58	63.50	38.10	53.98	31.75	12.9
K 212 RX 112 250	101.60	101.60	31.75	50.80	41.28	63.50	31.75	10.5
K 212 RX 125 250	101.60	101.60	31.75	50.80	41.28	63.50	38.10	10.5
K 250 R 125 200	101.60	101.60	31.75	50.80	41.28	63.50	31.75	10.5
K 250 R 150 200	101.60	101.60	31.75	50.80	41.28	63.50	38.10	10.5
K 250 R 125 250	114.30	101.60	31.75	63.50	41.28	63.50	31.75	10.5
K 250 R 150 250	114.30	101.60	31.75	63.50	41.28	63.50	38.10	10.5
K 300 R 175 275	127.00	114.30	38.10	69.85	48.26	76.20	44.45	9.3
K 325 R 175 250	120.65	114.30	44.45	63.50	50.80	82.55	44.45	5.4
K 325 R 200 250	120.65	114.30	44.45	63.50	50.80	82.55	50.80	5.4
K 325 R 175 275	127.00	114.30	44.45	69.85	50.80	82.55	44.45	5.4
K 325 R 200 275	127.00	114.30	44.45	69.85	50.80	82.55	50.80	5.4
K 325 RX 175 275	146.05	152.40	44.45	69.85	50.80	82.55	44.45	5.4
K 325 RX 200 275	146.05	152.40	44.45	69.85	50.80	82.55	50.80	5.4
K 350 R 225 325	146.05	127.00	50.80	82.55	58.72	88.90	57.15	6.5
K 500 R 300 450	209.55	190.50	69.85	114.30	76.20	127.00	76.20	3.5
K 500 R 325 450	209.55	190.50	69.85	114.30	76.20	127.00	82.55	3.5