


KEYTE SELF-ALIGNING BEARINGS

METRIC PIN-SIZE - 'G'								
Part-Number	ALL DIMENSIONS IN INCHES (UNLESS STATED OTHERWISE)							Max Angle
	A	B	C	D	E	F	G/mm	+/- deg
K 100 RM 012 125	2.00	1.50	0.563	1.25	0.628	1.00	12	4.7
K 100 RM 016 125	2.00	1.50	0.563	1.25	0.686	1.00	16	9.0
K 125 RM 020 100	2.00	2.00	0.750	1.00	0.875	1.25	20	7.6
K 125 RM 020 125	2.25	2.00	0.750	1.25	0.875	1.25	20	7.6
K 125 RM 020 150	2.50	2.00	0.750	1.50	0.875	1.25	20	7.6
K 175 RM 22A 150	2.75	2.50	1.000	1.50	28mm	1.75	22	4.1
K 175 RM 024 150	2.75	2.50	1.000	1.50	1.250	1.75	24	10.7
K 175 RM 025 150	2.75	2.50	1.000	1.50	1.250	1.75	25	10.7
K 175 RM 22A 045	3.02	2.50	1.000	45mm	28mm	1.75	22	4.1
K 175 RM 024 045	3.02	2.50	1.000	45mm	1.250	1.75	24	10.7
K 175 RM 025 045	3.02	2.50	1.000	45mm	1.250	1.75	25	10.7
K 175 RX 22A 150	3.00	3.00	1.000	1.50	28mm	1.75	22	4.1
K 175 RX 024 150	3.00	3.00	1.000	1.50	1.250	1.75	24	10.7
K 175 RX 025 150	3.00	3.00	1.000	1.50	1.250	1.75	25	10.7
K 175 RX 22A 225	3.75	3.00	1.000	2.25	28mm	1.75	22	4.1
K 175 RX 024 225	3.75	3.00	1.000	2.25	1.250	1.75	24	10.7
K 175 RX 025 225	3.75	3.00	1.000	2.25	1.250	1.75	25	10.7
K 212 RM 030 150	3.00	3.00	1.125	1.50	1.500	2.12	30	13.0
K 212 RM 032 150	3.00	3.00	1.125	1.50	1.500	2.12	32	13.0
K 212 RM 030 200	3.50	3.00	1.125	2.00	1.500	2.12	30	13.0
K 212 RM 032 200	3.50	3.00	1.125	2.00	1.500	2.12	32	13.0
K 212 RM 030 275	4.25	3.00	1.125	2.75	1.500	2.12	30	13.0
K 212 RM 032 275	4.25	3.00	1.125	2.75	1.500	2.12	32	13.0
K 212 RM 030 450	6.00	3.00	1.125	4.50	1.500	2.12	30	13.0
K 212 RM 032 450	6.00	3.00	1.125	4.50	1.500	2.12	32	13.0

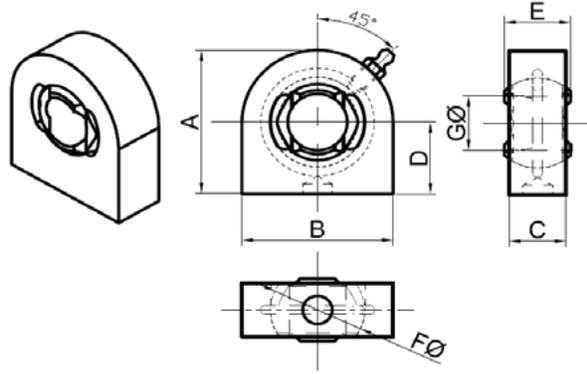

KEYTE SELF-ALIGNING BEARINGS

METRIC PIN-SIZE - 'G'									
Part-Number	ALL DIMENSIONS IN INCHES (UNLESS STATED OTHERWISE)							Max Angle	
	A	B	C	D	E	F	G/mm	+/- deg	
K 212 RX 030 175	3.75	4.00	1.125	1.75	1.500	2.12	30	13.0	
K 212 RX 032 175	3.75	4.00	1.125	1.75	1.500	2.12	32	13.0	
K 212 RX 030 200	4.00	4.00	1.125	2.00	1.500	2.12	30	13.0	
K 212 RX 032 200	4.00	4.00	1.125	2.00	1.500	2.12	32	13.0	
K 212 RX 030 225	4.25	4.00	1.125	2.25	1.500	2.12	30	13.0	
K 212 RX 032 225	4.25	4.00	1.125	2.25	1.500	2.12	32	13.0	
K 212 RX 030 250	4.50	4.00	1.125	2.50	1.500	2.12	30	13.0	
K 212 RX 032 250	4.50	4.00	1.125	2.50	1.500	2.12	32	13.0	
K 250 RM 035 200	4.00	4.00	1.250	2.00	1.625	2.50	35	10.5	
K 250 RM 040 200	4.00	4.00	1.250	2.00	1.625	2.50	40	10.5	
K 250 RM 042 200	4.00	4.00	1.250	2.00	1.625	2.50	42	10.5	
K 250 RM 035 250	4.50	4.00	1.250	2.50	1.625	2.50	35	10.5	
K 250 RM 040 250	4.50	4.00	1.250	2.50	1.625	2.50	40	10.5	
K 250 RM 042 250	4.50	4.00	1.250	2.50	1.625	2.50	42	10.5	
K 300 RM 045 275	5.00	4.50	1.500	2.75	1.900	3.00	45	9.3	
K 325 RM 050 250	4.75	4.50	1.750	2.50	2.000	3.25	50	5.4	
K 325 RM 050 275	5.00	4.50	1.750	2.75	2.000	3.25	50	5.4	
K 325 RX 050 275	5.75	6.00	1.750	2.75	2.000	3.25	50	5.4	
K 400 RM 060 315	6.40	6.50	2.000	3.15	2.375	4.00	60	6.4	
K 400 RM 060 600	9.25	6.50	2.000	6.00	2.375	4.00	60	6.4	
K 500 RM 075 450	8.25	7.50	2.750	4.50	3.000	5.00	75	3.5	
K 500 RM 080 450	8.25	7.50	2.750	4.50	3.000	5.00	80	3.5	